

BOLT ON LONG THROW KEYLATCH



SPECIFICATION SHEET

169

- G Gate can be slammed shut and requires the key to open every time.
- G Stainless steel latchbolt which springs a unique 22mm into the gate post. Long throw for extra security.
- G Supplied with bolt guide plate and gate post strike plate to ensure extra smooth closing action.
- G Easy to rotate latchbolt for LH/RH gates.
- G Latchbolt is adjustable in length for precise fitting on site
- G Low key rotation force suitable for disabled use.



PRODUCT OPTIONS

Two locks available:

- SBKLLT1601** to fit flat bar or up to 30mm box section
- SBKLLT1602** to fit 40mm – 60mm box section




INSTALLATION

1. Drill 2 x 9mm dia. holes at 92mm centres for M8 fixing bolts.
2. Drill 18mm clearance hole for latchbolt at 22mm centres down from the top 9mm hole.
3. Fix lock in place using stainless steel clamp plate, bolt support plate and 2 stainless steel countersunk fixing bolts supplied.
4. Drill clearance hole in keep or outer frame to receive the latchbolt. Slot this hole vertically to allow for gate sag.
5. Ensure latchbolt moves freely without binding on gate or frame.

MAINTENANCE

- Every 2 months - Lubricate latchbolt with light oil.
- Annually – Dismantle lock and spray mechanism inside with light oil.

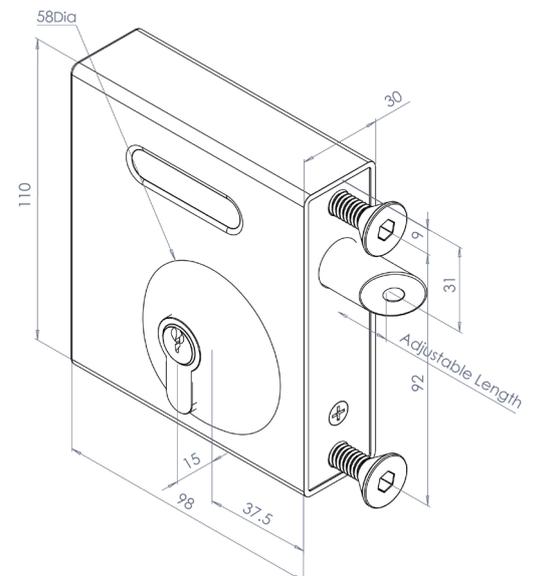

GATEMASTER

VISIT GATEMASTERLOCKS.COM FOR MORE INFORMATION

